





M6X0.25 ADJUSTER SCREWS
 PROVIDES $\pm 5^\circ$ TOTAL ANGULAR DISPLACEMENT
 (0.32° PER REVOLUTION)
 AND $\pm 3\text{mm}$ TOTAL TRANSLATION DISPLACEMENT
 3 PLACES




SM1 ($\phi 1.035\text{in}-40$) SERIES INTERNAL THREAD
 ACCEPTS $\phi 25.4\text{mm}$ [1.00in] MAXIMUM 5.5mm [0.22in] THICK OPTICS
 2 SM1 RETAINING RINGS INCLUDED
 2.0mm [0.08in] THICK
 $\phi 23.0\text{mm}$ [0.90in] CLEAR APERTURE




M4X0.7 THROUGH TAPPED HOLE
 3 PLACES

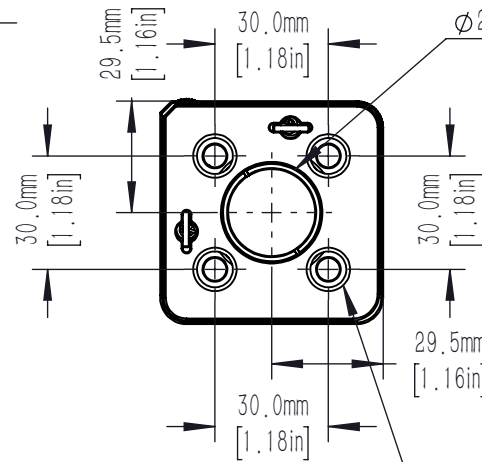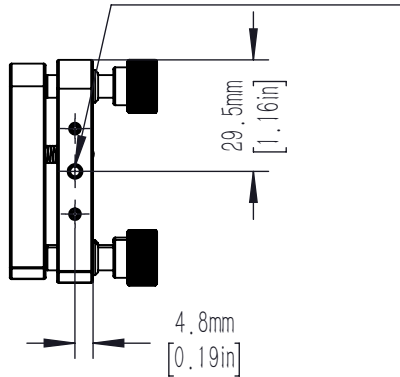


CAGE ROD CLEARNACE BORES
 ALLOW FRONT PLATE TO ASSEMBLY IN
 TO A CAGE SYSTEM

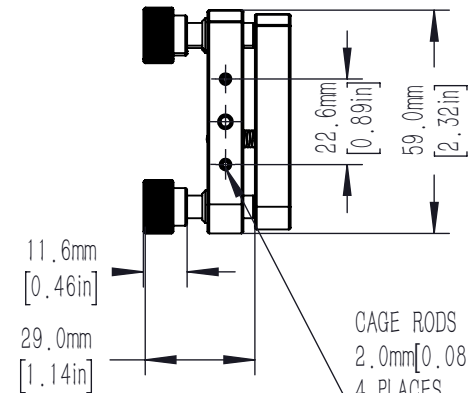

CAGE RODS LOCKING SET SCREW
 2.0mm [0.08in] HEX
 4 PLACES

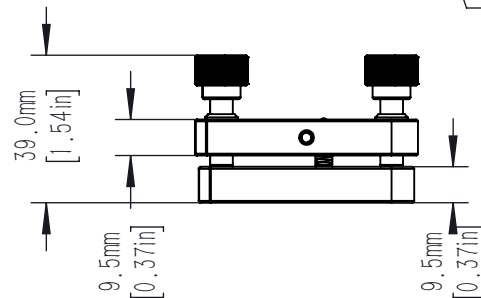

DRAWING PROJECTION 			CSHS1—A					
	NAME	DATE						
DRAWN	NIC	9th/June/2025	30mm CAGE MIRROR MOUNT WITH SM1 THREADED FOR ϕ 25.4mm OPTICS		MATERIAL	WEIGHT	SCALE	REV
APPROVAL	DICK	9th/June/2025			FOLLOW THE PARTS	0.151	1:1	VI
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION					shop.zolix.com.cn			