


LOCKING SCREW FOR ROTATION
2.0mm(0.08in) HEX
DO NOT OVERTIGHTEN
WHEN LOCKING

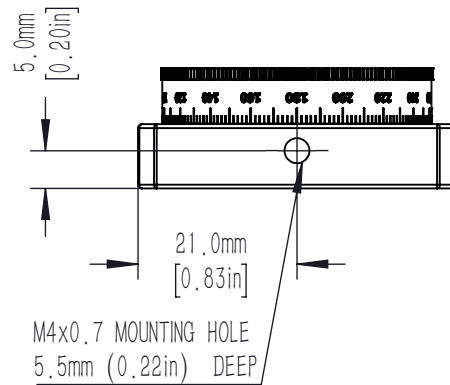

Ø6mm[0.24in]
FOR USING WITH Ø6mm
CAGE ASSEMBLY RODS
4 PLACES


0.90mm (0.04in) COMPATIBLE
WITH SPANNER WRENCH
SRW1A (NOT INCLUDED)

LOCKING FOR Ø6mm (Ø0.24in) RODS
1.5mm(0.06in) HEX
4 PLACES
(2 PLACES, 2 SIDES)


KNURLED SURFACE
ALLOWS EASY GRIPPING

ENGRAVED NUMERIC PER 20°
2° RESOLUTION

SM1(Ø1.035-40) SERIES INTERNAL THREAD,
11.4mm (0.45in) DEEP
ONE SM1 RETAINING RING (INCLUDED),
2.0mm (0.08in) THICK
Ø23.0mm [0.91in] CLEAR APERTURE

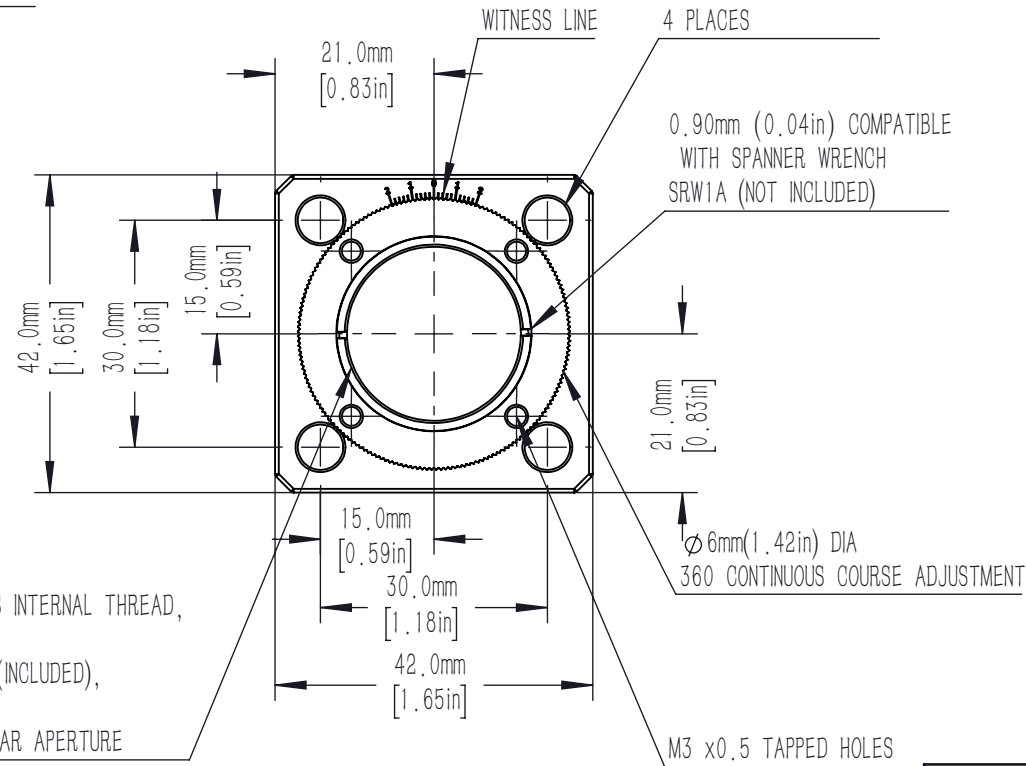

8.5mm
[0.33in]
15.9mm
[0.63in]

DRAWING PROJECTION 			CSMR1-ADS					
NAME	NIC	DATE						
DRAWN	DICK	9th/June/2025	30mm CAGE ROTATION MOUNT WITH VERNIER SCALE		MATERIAL	WEIGHT	SCALE	REV
APPROVAL	DICK	9th/June/2025			FOLLOW THE PARTS	0.038	1:1	V1
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION					shop.zolix.com.cn			