

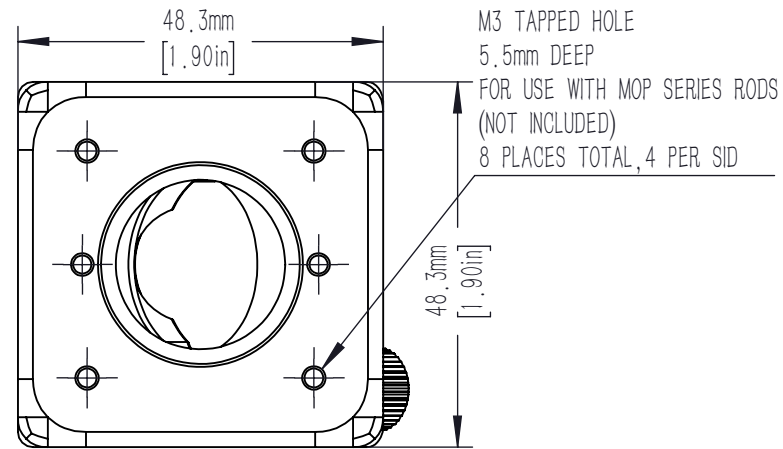
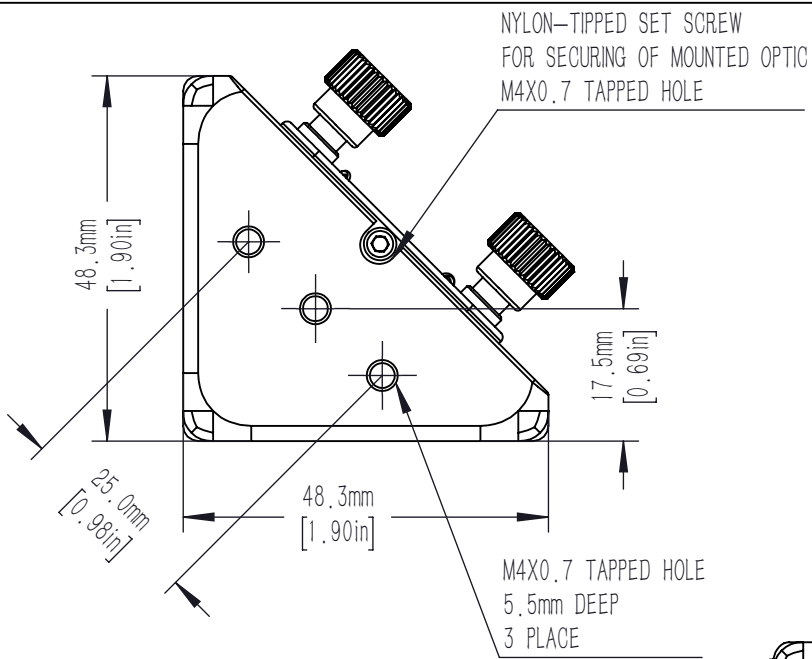
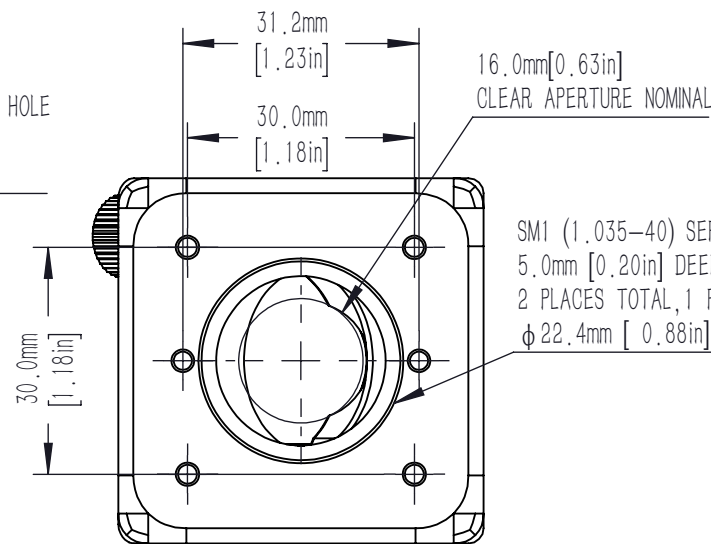


M5X0.25 ADJUSTER SCREWS PROVIDES $\pm 4^\circ$ TOTAL ANGULAR DISPLACEMENT 2 PLACES 2.0mm

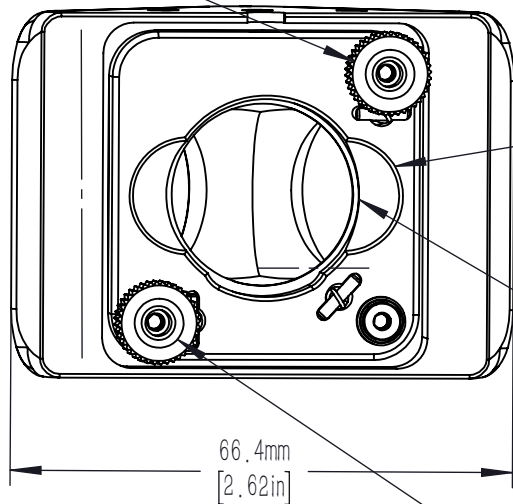

M4X0.7 TAPPED HOLE 5.5mm DEEP 3 PLACE

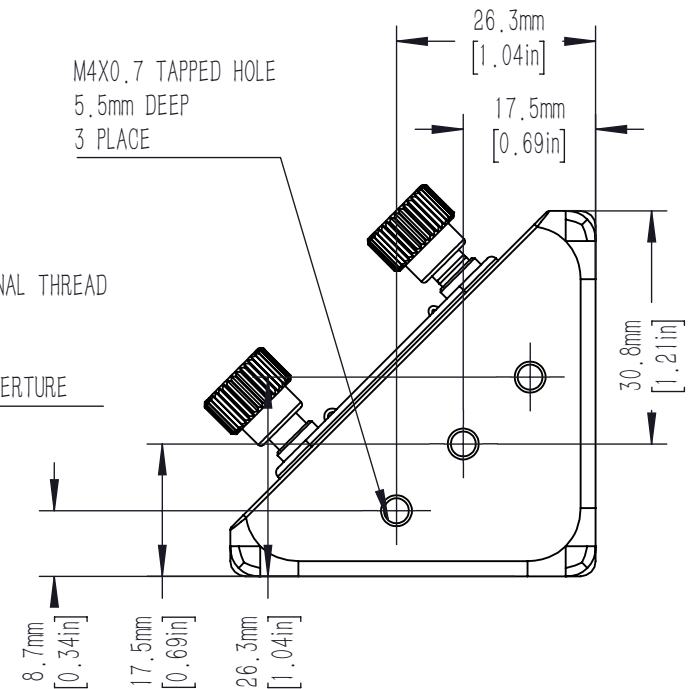


AIDS IN INSTALLATION/REMOVAL OF OPTICS

MOUNTING DOUBLE-BORE ACCEPTS $\phi 25.4\text{mm}$ [1.00in] MINIMUM 3.0mm [0.12in] THICK OPTICS 6.0mm [0.24in] DEEP $\phi 24.1\text{mm}$ [0.95in] CLEAR APERTURE

M5X0.25 ADJUSTER SCREW FOR MIRROR SURFACE TRANSLATION 2.0mm

DRAWING PROJECTION



	NAME	DATE
DRAWN	NIC	9th/June/2025
APPROVAL	DICK	9th/June/2025
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION		

CSRA1-AC

RIGHT ANGLE 30mm CAGE MOUNT FOR $\phi 25.4\text{mm}$ OPTICS, M3 TAPPED HOLE

Zolix

MATERIAL	WEIGHT	SCALE	REV
FOLLOW THE PARTS	0.137	1:1	VI
shop.zolix.com.cn			