



M6x1.0 MOUNTING HOLE
5.7mm (0.22in) DEEP

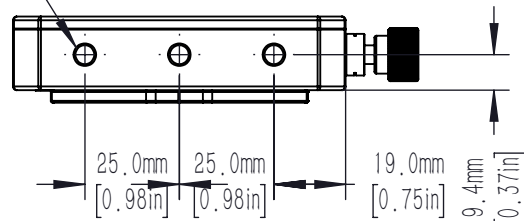



±2.0mm X & Y PLANE TRAVEL RANGE

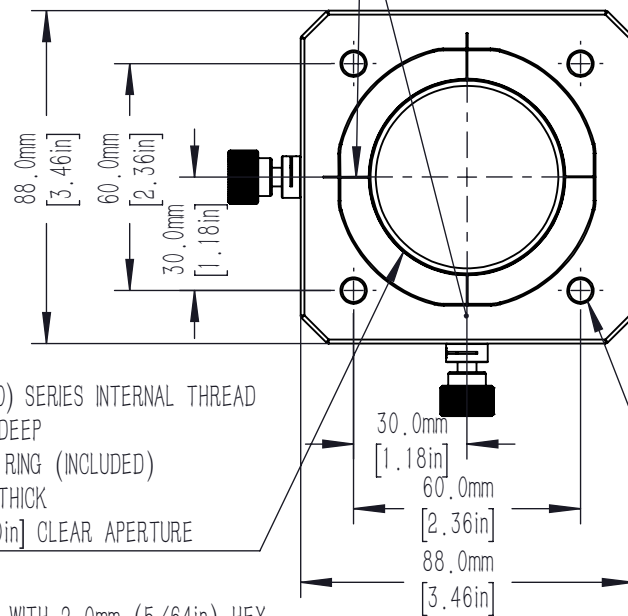

SM2(φ2.035-40) SERIES INTERNAL THREAD
18mm (0.71in) DEEP
SM2SR RETAINING RING (INCLUDED)
2.5mm (0.1in) THICK
φ48.3mm [1.90in] CLEAR APERTURE

ADJUSTER KNOB WITH 2.0mm (5/64in) HEX
M5x0.25 THREAD, 0.25mm/REV [0.01in/REV]
2 PLACES


LOCKING FOR ADJUSTER KNOB
1.5mm(0.06in) HEX
2 PLACES

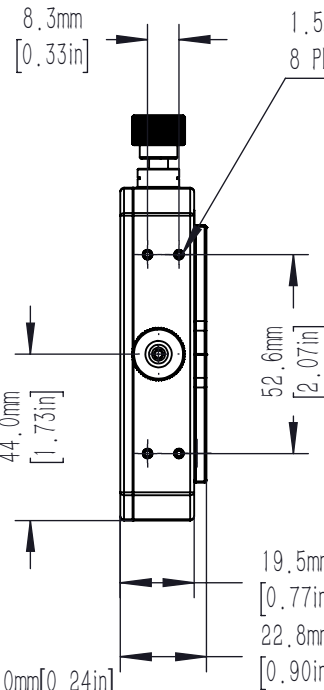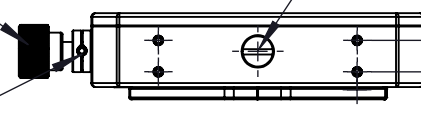


φ6.0mm[0.24in]
FOR USE WITH φ6mm
CAGE ASSEMBLY RODS
4 PLACES

M6x1.0 MOUNTING HOLE
5.7mm (0.22in) DEEP

LOCKING FOR φ2.5mm (φ0.1in) RODS
1.5mm(0.06in) HEX
8 PLACES

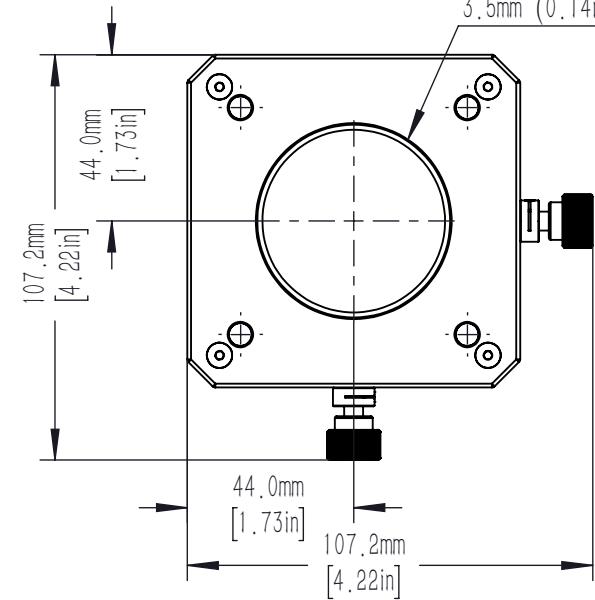

SM2(φ2.035-40) SERIES
INTERNAL THREAD
3.5mm (0.14in) DEEP

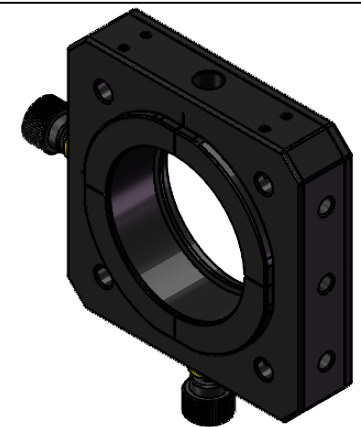

DRAWING PROJECTION			CSXYR2					
	NAME	DATE						
DRAWN	NIC	9th/June/2025	XY TRANSLATOR FOR 60mm CAGE AND 50.8mm OPTIC		MATERIAL	WEIGHT	SCALE	REV
APPROVAL	DICK	9th/June/2025			FOLLOW THE PARTS	0.261	1:2	VI
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION			shop.zolix.com.cn					