

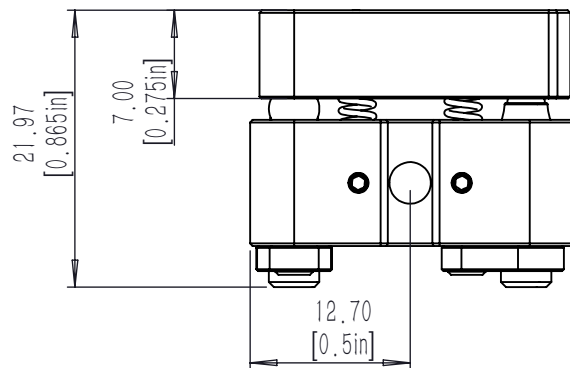
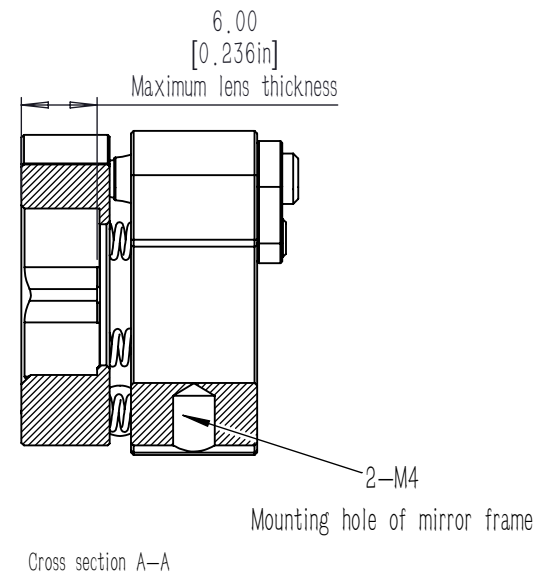


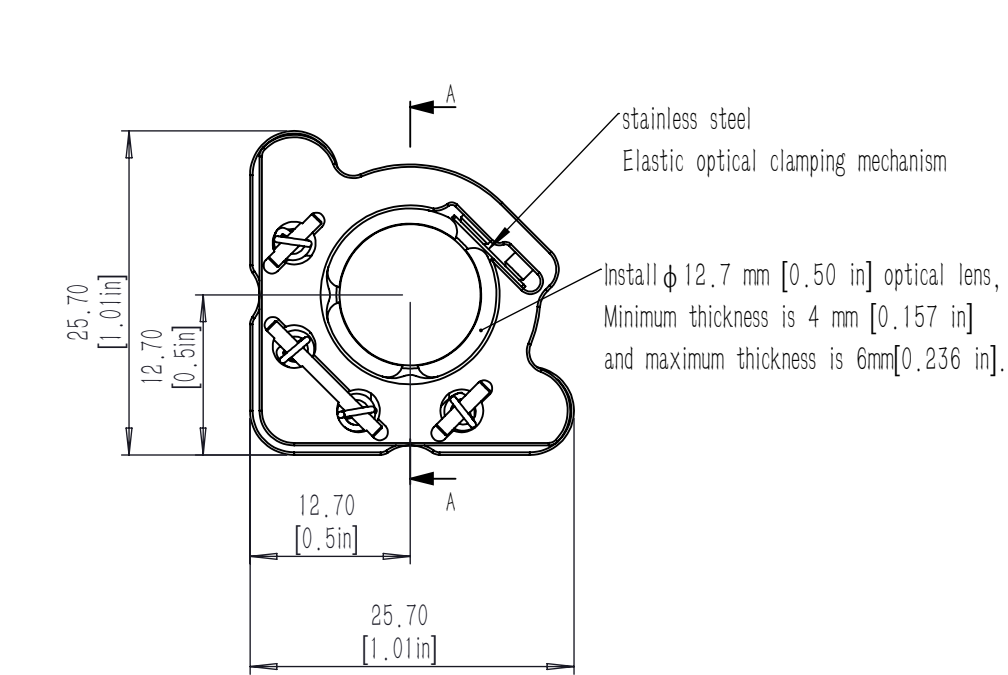

2-M4X0.25 adjustment screw,
providing $\pm 4^\circ$, 0.78° per turn,
lever locking,
2.0mm [5/64 inch] hexagon wrench hole.

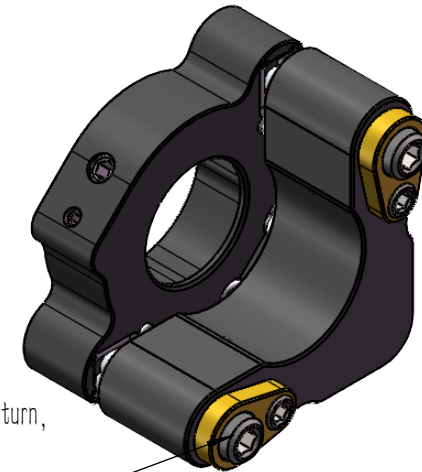

DRAWING PROJECTION				EMHS12.7-2C	Zolix			
	NAME	DATE						
DRAWN	NIC	10th/June/2025	Standard optical adjustment mount	MATERIAL	WEIGHT	SCALE	REV	
APPROVAL	DICK	10th/June/2025		FOLLOW THE PARTS	0.02	2:1.2	V1	
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION				shop.zolix.com.cn				