



POM glue head screws  
are used to fix optical elements.

Install  $\phi 50.8\text{mm}$  [2 in] optical lens,  
Min thickness is 7 mm [0.28 in]  
max thickness is 11mm[0.43 in].

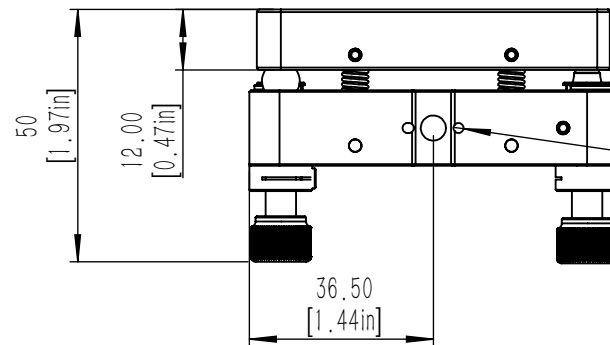


4- $\phi 2.00$   
Locating pin hole

11.00  
[0.43in]  
Maximum lens thickness

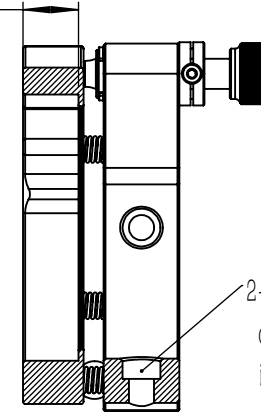

Cross section C-C

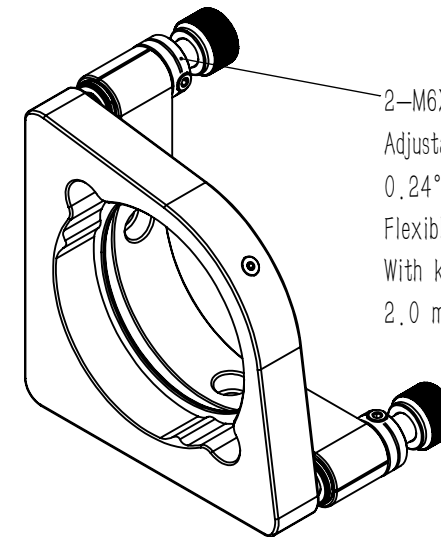

2-M6X0.25 adjusting screw,  
Adjustable angle range $\pm 4^\circ$ ,  
0.24° per turn,  
Flexible locking,  
With knob,  
2.0 mm [5/64 inch] hexagon wrench hole

DRAWING PROJECTION			EMHS50.8-2C			<b>Zolix</b>			
	NAME	DATE	Standard optical adjustment mount			MATERIAL	WEIGHT	SCALE	REV
DRAWN	NIC	10th/June/2025							
APPROVAL	DICK	10th/June/2025							
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION						FOLLOW THE PARTS	0.2	1:1.5	V1
						shop.zolix.com.cn			