



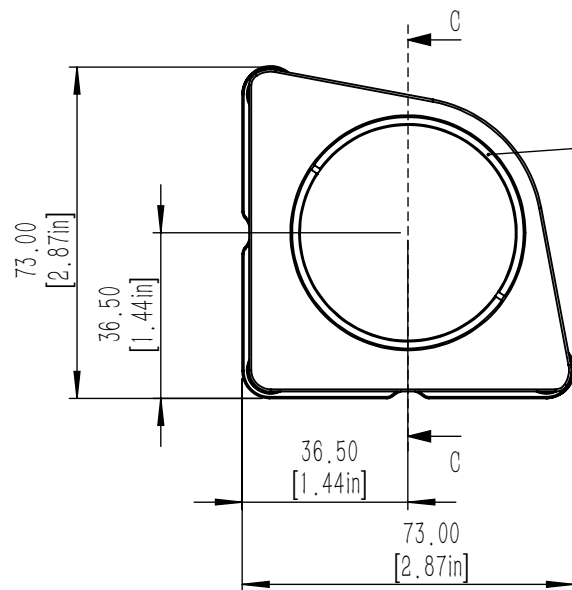


Install $\varnothing 50.8\text{mm}$ [2 in] optical lens,
max thickness is 8.5mm[0.34 in].
A SM2 snap ring is included.

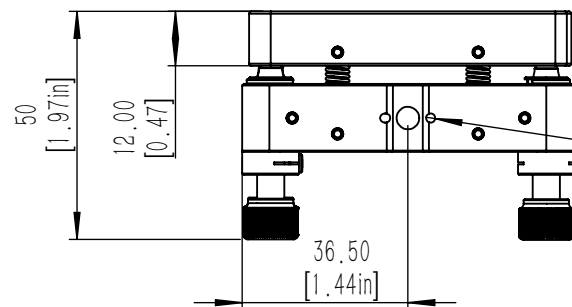


4- $\varnothing 2.00$
Locating pin hole

8.50
[0.34in]
Maximum lens thickness

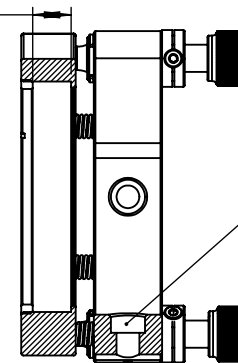

Cross section C-C

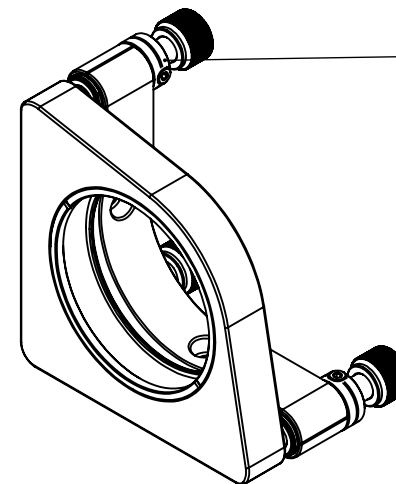

3-M6X0.25 adjusting screw,
Adjustable angle range $\pm 4^\circ$,
0.24 $^\circ$ per turn,
Flexible locking,
With knob,
2.0 mm [5/64 inch] hexagon wrench hole

DRAWING PROJECTION 			EMHS50.8-3B		Zolix			
	NAME	DATE	Standard optical adjustment mount		MATERIAL	WEIGHT	SCALE	REV
DRAWN	NIC	10th/June/2025						
APPROVAL	DICK	10th/June/2025						
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION					FOLLOW THE PARTS	0.2	1.2.2	V1
					shop.zolix.com.cn			