




POM glue head screws are used to fix optical elements.

-Install square optical element, left—handed system Accepts a height of 12.7 mm (0.50 inch) Minimum thickness is 4 mm [0.157 inch] The maximum thickness is 5 mm [0.2 inch].

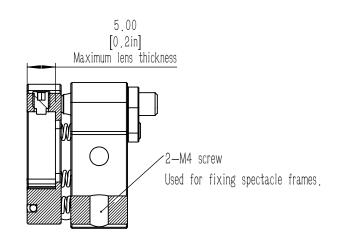

Cross section A—A

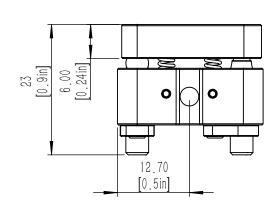

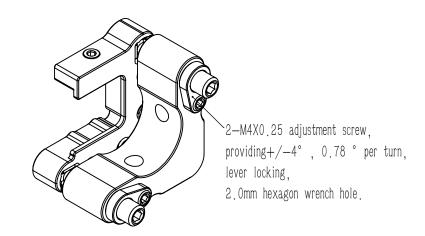

DRAWING PROJECTION			EMR12.7-2AL	Zolix			
	NAME	DATE					
DRAWN	NIC	10th/June/2025	Rectangular	MATERIAL	WEIGHT	SCALE	REV
APPROVAL	DICK	10th/June/2025		FOLLOW THE PARTS	0.02	1,5,1	V1
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION			adjusting frame	shop.zolix.com.cn			