

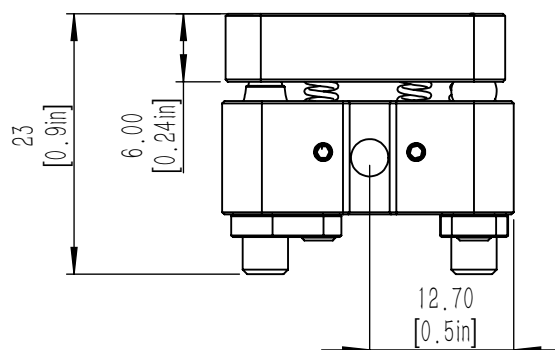


Installing square optical elements, right-handed
Accepts a height of 12.7 mm (0.50 inch)
Minimum thickness is 4 mm [0.157 inch]
The maximum thickness is 5 mm [0.2 inch].

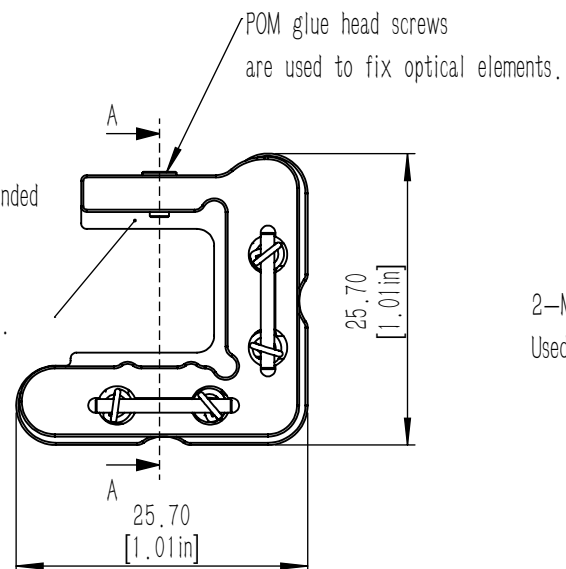



2—M4 screw
Used for fixing spectacle frames.

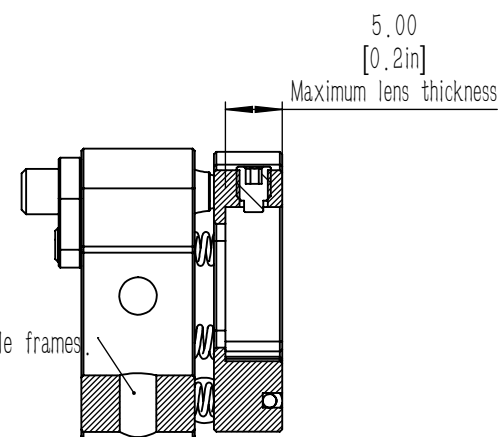

Cross section A—A

2—M4X0.25 adjustment screw,
providing $\pm 4^\circ$, 0.78° per turn,
lever locking,
2.0mm hexagon wrench hole.

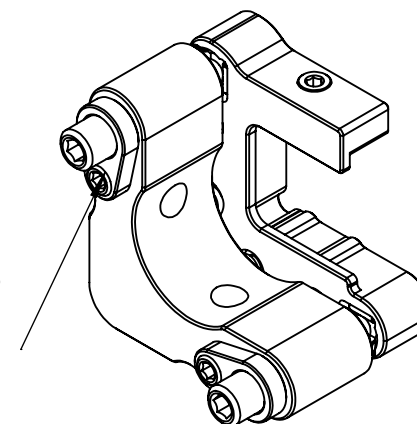

DRAWING PROJECTION 			EMR12.7—2AR		Zolix			
	NAME	DATE	Rectangular adjusting frame		MATERIAL	WEIGHT	SCALE	REV
DRAWN	NIC	10th/June/2025						
APPROVAL	DICK	10th/June/2025						
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION					FOLLOW THE PARTS	0.02	1.5:1	V1
					shop.zolix.com.cn			