

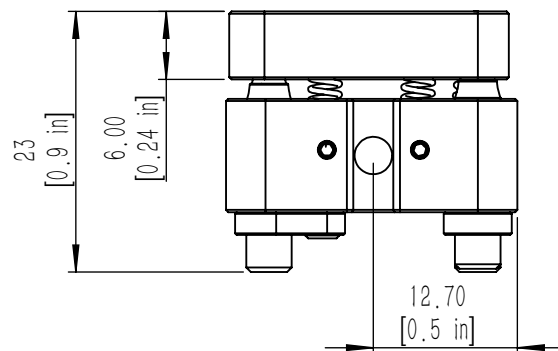


POM glue head screws
are used to fix optical elements.

Install square optical element, right hand system
Accepts a height of 12.7 mm (0.50 inch)
Minimum thickness is 4 mm [0.157 inch]
The maximum thickness is 5 mm [0.2 inch].

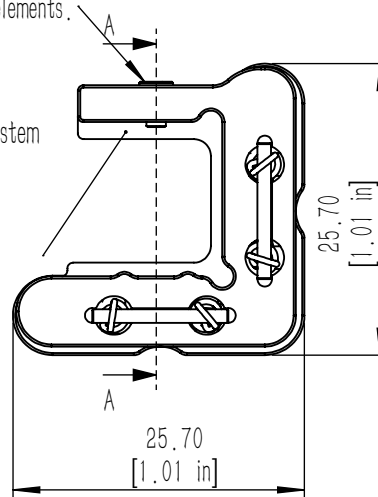


2—M4 screw
Used for fixing spectacle frames.

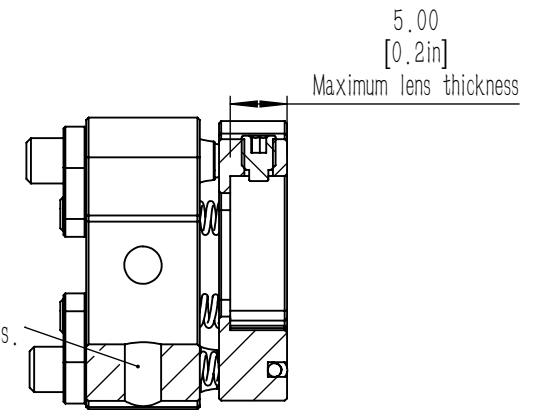

Cross section A—A

3—M4X0.25 adjustment screw,
providing $\pm 4^\circ$, 0.78° per turn,
lever locking,
2.0mm hexagon wrench hole.

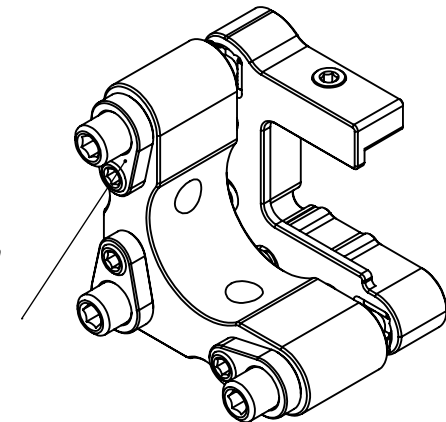

DRAWING PROJECTION 			EMR12.7—3AR	Zolix			
	NAME	DATE		Rectangular adjusting frame	MATERIAL	WEIGHT	SCALE
DRAWN	NIC	10th/June/2025	FOLLOW THE PARTS		0.1	1.5:1	V1
APPROVAL	DICK	10th/June/2025					
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION			shop.zolix.com.cn				