



INNER SLIP PLATE LOCKING SCREW
2.0mm [5/64in] HEX
3 PLACES

SM1 (1.035-40) SERIES INTERNAL THREAD THRU
2 R-SM1 RETAINING RINGS INCLUDED
MAX OPTIC THICKNESS 7.5mm

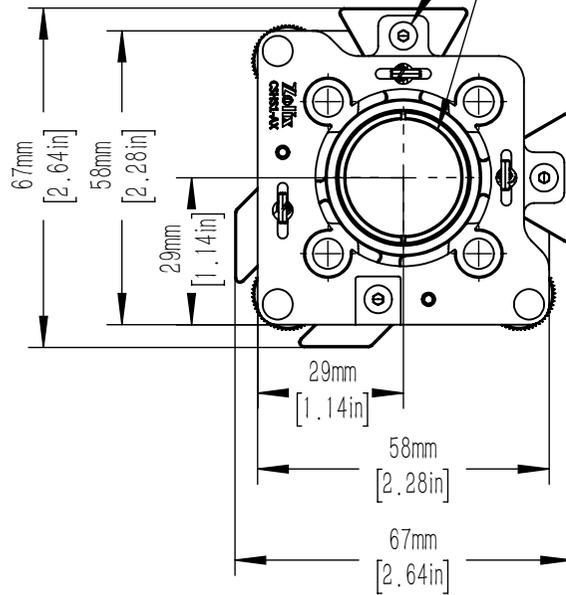


INNER SLIP PLATE
FINGER GRIPS FOR EASE
OF MANUAL X-Y TRANSLATION
 $\pm 1.0\text{mm}$ [0.04in] PER AXIS
4 PLACES

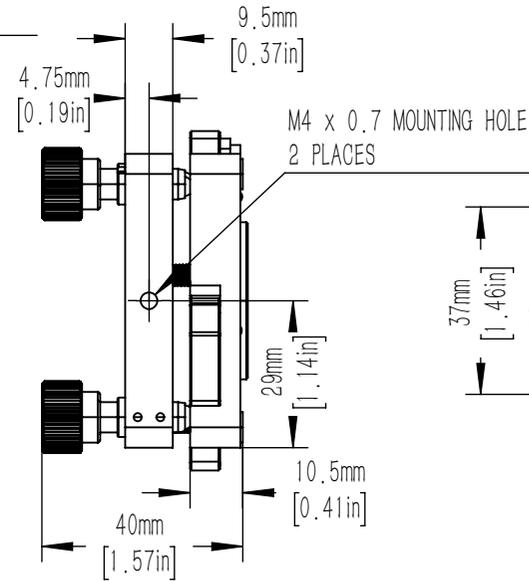

M4 x 0.7 MOUNTING HOLE
2 PLACES


LARGE APERTURE ALLOWS FOR
SM1 (1.035-40) SERIES LENS TUBE
TO BE MOUNTED TO INNER SLIP
PLATE FROM BACK PLATE

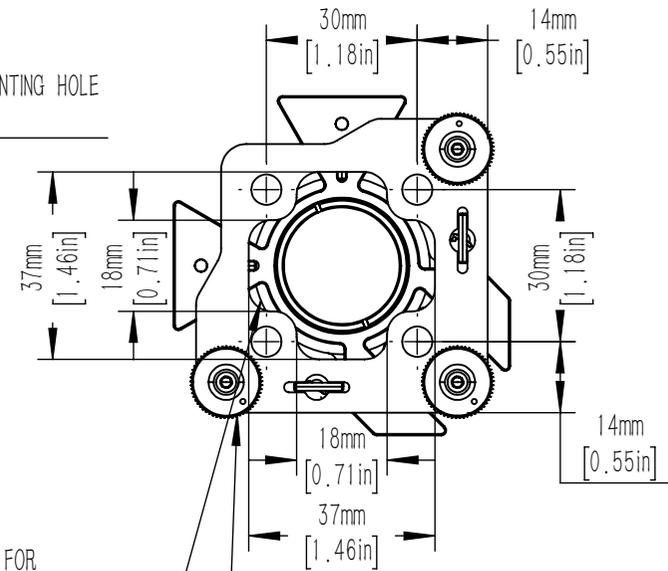

M6X0.25 ADJUSTER SCREWS PROVIDES $\pm 4^\circ$
TOTAL ANGULAR DISPLACEMENT
(0.32° PER REVOLUTION)
AND $\pm 3\text{mm}$ TOTAL TRANSLATION DISPLACEMENT
3 PLACES

CAGE LOCKING SCREW
2.0mm [5/64in] HEX
2 PLACES, BOTH SIDES

ADJUSTER LOCKING SCREW
2.0mm [5/64in] HEX
3 PLACES



DRAWING PROJECTION				CSHS1-AX					
DRAWN		NAME	DATE						
APPROVAL		DICK	6th/Nov/2025	MATERIAL	WEIGHT	SCALE	REV		
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION				FOLLOW THE PARTS	0.120	2:3	V1		
				shop.zolix.com.cn					