

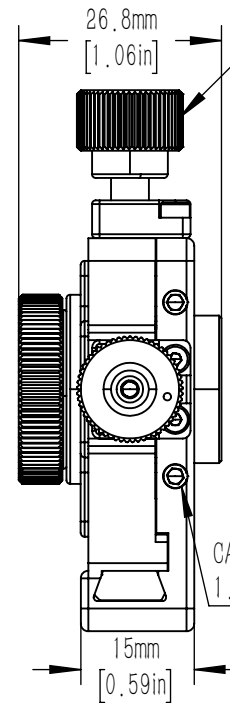


M5X0.25 LOCKABLE ADJUSTER SCREWS  
 PROVIDES +/-1.5mm TOTAL LINEAR DISPLACEMENT  
 (0.25mm PER REVOLUTION)  
 2 PLACES  
 2.0mm [5/64in] HEX

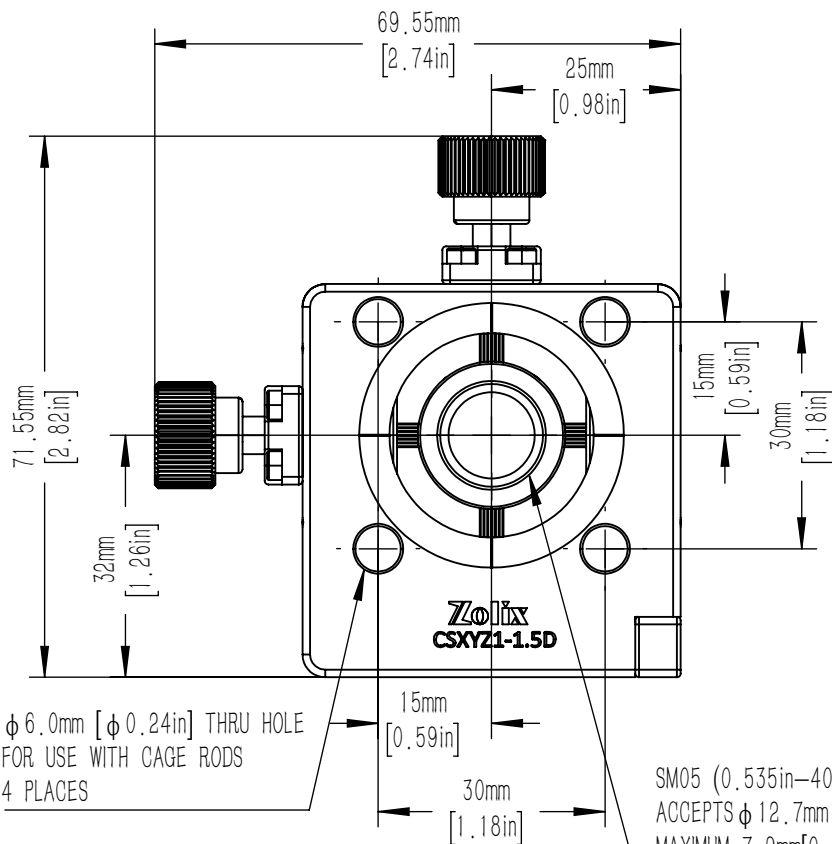

CAGE ROD LOCKING SET SCREW  
 1.5mm HEX4 PLACES TOTAL

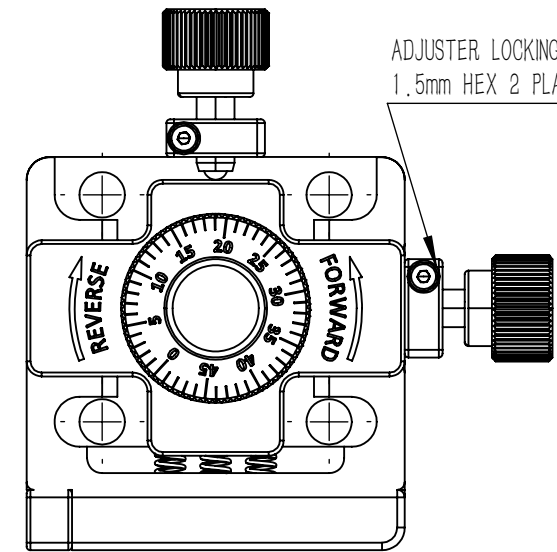

ADJUSTER LOCKING SCREW  
 1.5mm HEX 2 PLACES

phi 6.0mm [phi 0.24in] THRU HOLE  
 FOR USE WITH CAGE RODS  
 4 PLACES

SM05 (0.535in-40) SERIES INTERNAL THREAD  
 ACCEPTS phi 12.7mm [0.50in]  
 MAXIMUM 7.9mm [0.31in] THICK OPTICS  
 1 R-SM05 RETAINING RINGS INCLUDED  
 phi 11.4mm [0.45in] CLEAR APERTURE

DRAWING PROJECTION		
NAME	DATE	
DRAWN	NIC	6th/Nov/2025
APPROVAL	DICK	6th/Nov/2025
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION		

CSXYZ1-1.5D

**Zolix**

XYZ DISPLACEMENT  
 ADJUSTMENT FIXTURE

MATERIAL	WEIGHT	SCALE	REV
FOLLOW THE PARTS	0.089	1:1	V1
shop.zolix.com.cn			