
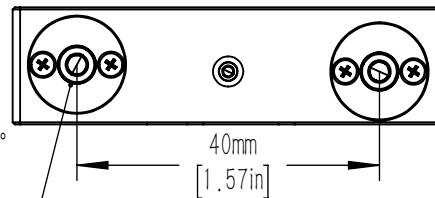
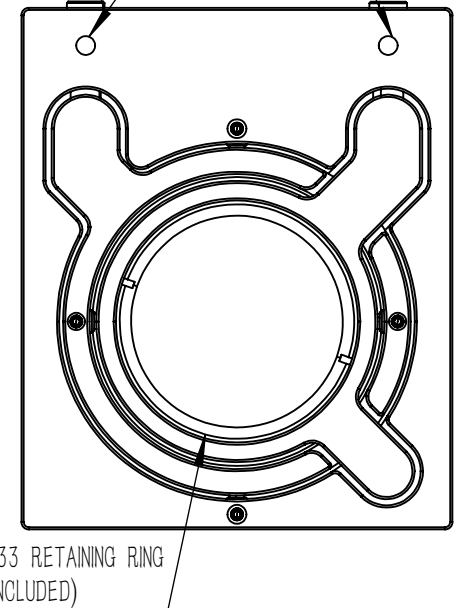
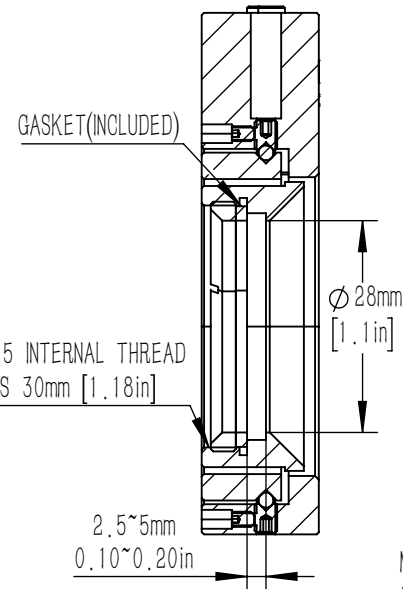


LOCKING SCREW WITH 1.5mm [0.06in] HEX

A-A

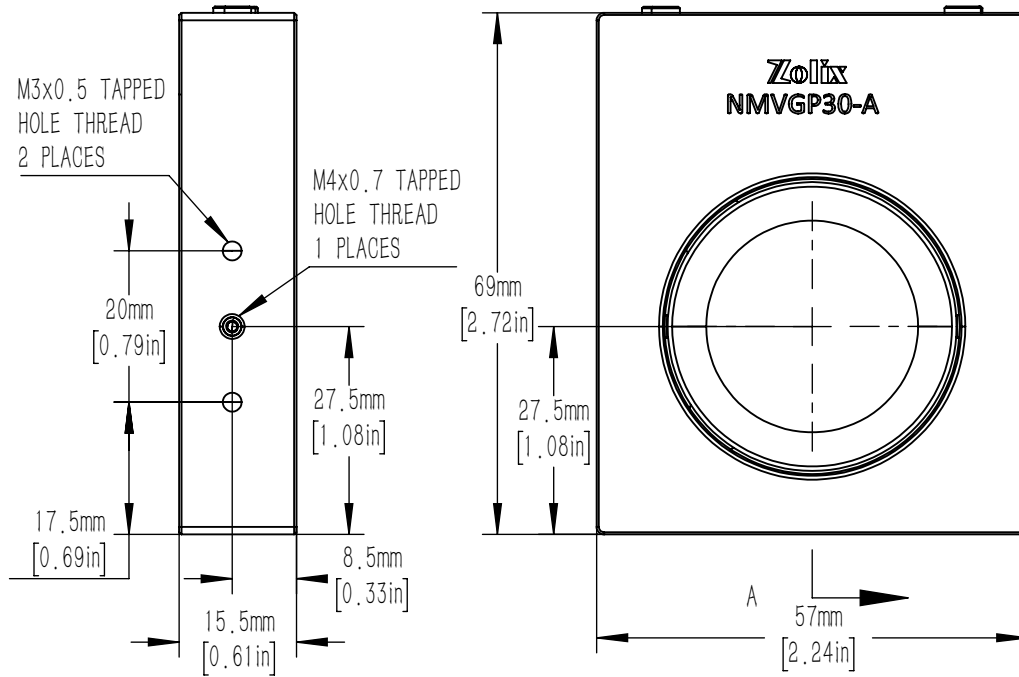

M5x0.25 NO KNURLED ADJUSTER SCREWS PROVIDED  $\pm 1.2^\circ$  PITCH ANGLE DISPLACEMENT (0.34° PER REVOLUTION)  
YAW ANGLE DISPLACEMENT (0.4° PER REVOLUTION)  
WITH LOCK SCREW 2 PLACES 3mm [0.12in] HEX (INCLUDED)

DRAWING PROJECTION				<h1>NMVGP30-A</h1>											
NAME		DATE													
DRAWN		NIC		1st/Feb/2026		UPPER-ADJUSTABLE UNIVERSAL BEAM SPLITTER MOUNT		MATERIAL		WEIGHT		SCALE		REV	
APPROVAL		DICK		1st/Feb/2026				FOLLOW THE PARTS		0.116		1:1		V1	
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION						shop.zolix.com.cn									