
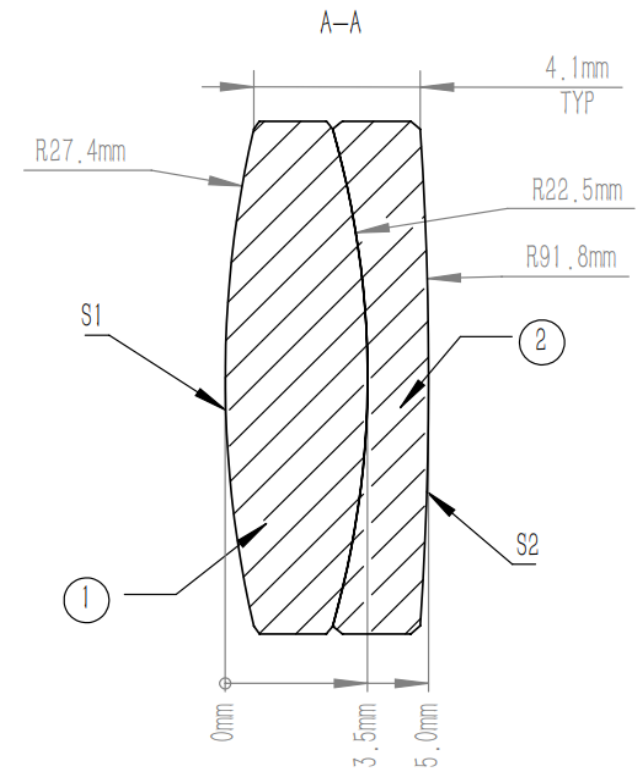


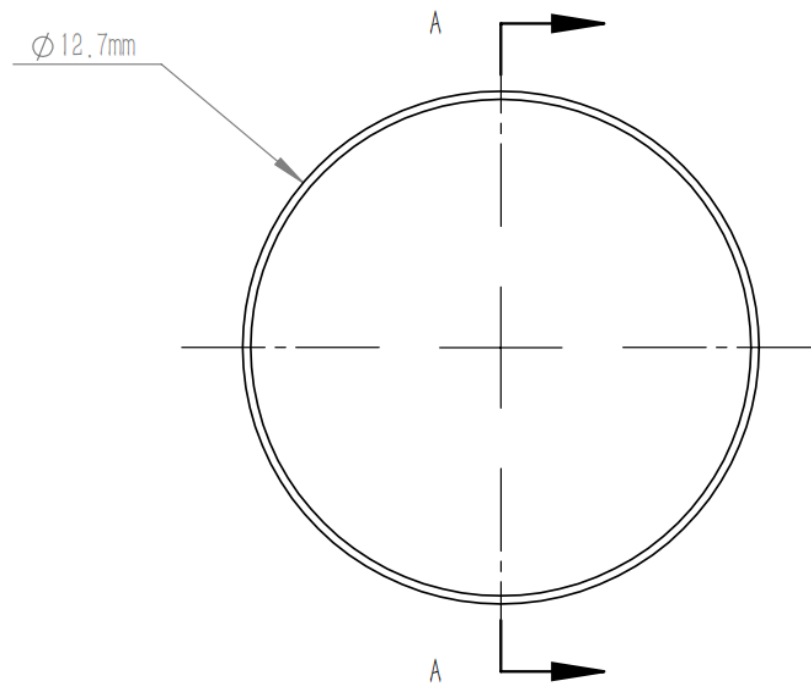

1. DESIGN WAVELENGTH: 486.1 nm, 587.6 nm & 656.3 nm
2. CLEAR APERTURE: $>90\%CA$
3. OPERATION WAVELENGTH: 400 nm–700 nm
4. DIAMETER TOLERANCE: $+0.0/-0.1\text{ mm}$
5. THICKNESS TOLERANCE: $\pm 0.1\text{ mm}$
6. FOCAL LENGTH: $50.0\text{ mm} \pm 1\% @ 587.6\text{ nm}$
7. BACK FOCAL LENGTH(REF): 47.2 mm
8. SURFACE QUALITY(S/D)(S1,S2): 40/20
9. SURFACE POWER(S1,S2): $3\lambda/2 @ 632.8\text{ nm}$
10. SURFACE IRREGULARITY(S1,S2): $\lambda/4 @ 632.8\text{ nm}$
11. CENTRATION: $<3\text{ arcmin}$
12. CHAMFER: $<0.2\text{ mm}, 45^\circ$
13. COATING(S1,S2): AR COATING $R_{\text{avg}} < 0.5\% @ 400\text{ nm} - 700\text{ nm}$

DRAWING PROJECTION 			ZAC127-050-A		Zolix			
	NAME	DATE						
DRAWN	JAC	18th/JUL./2025	ACHROMATIC DOUBLETS		MATERIAL	WEIGHT	SCALE	REV
APPROVAL	OLI	18th/JUL./2025			FOLLOW THE PARTS		5:1	1.0
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION			shop.zolix.com.cn					