
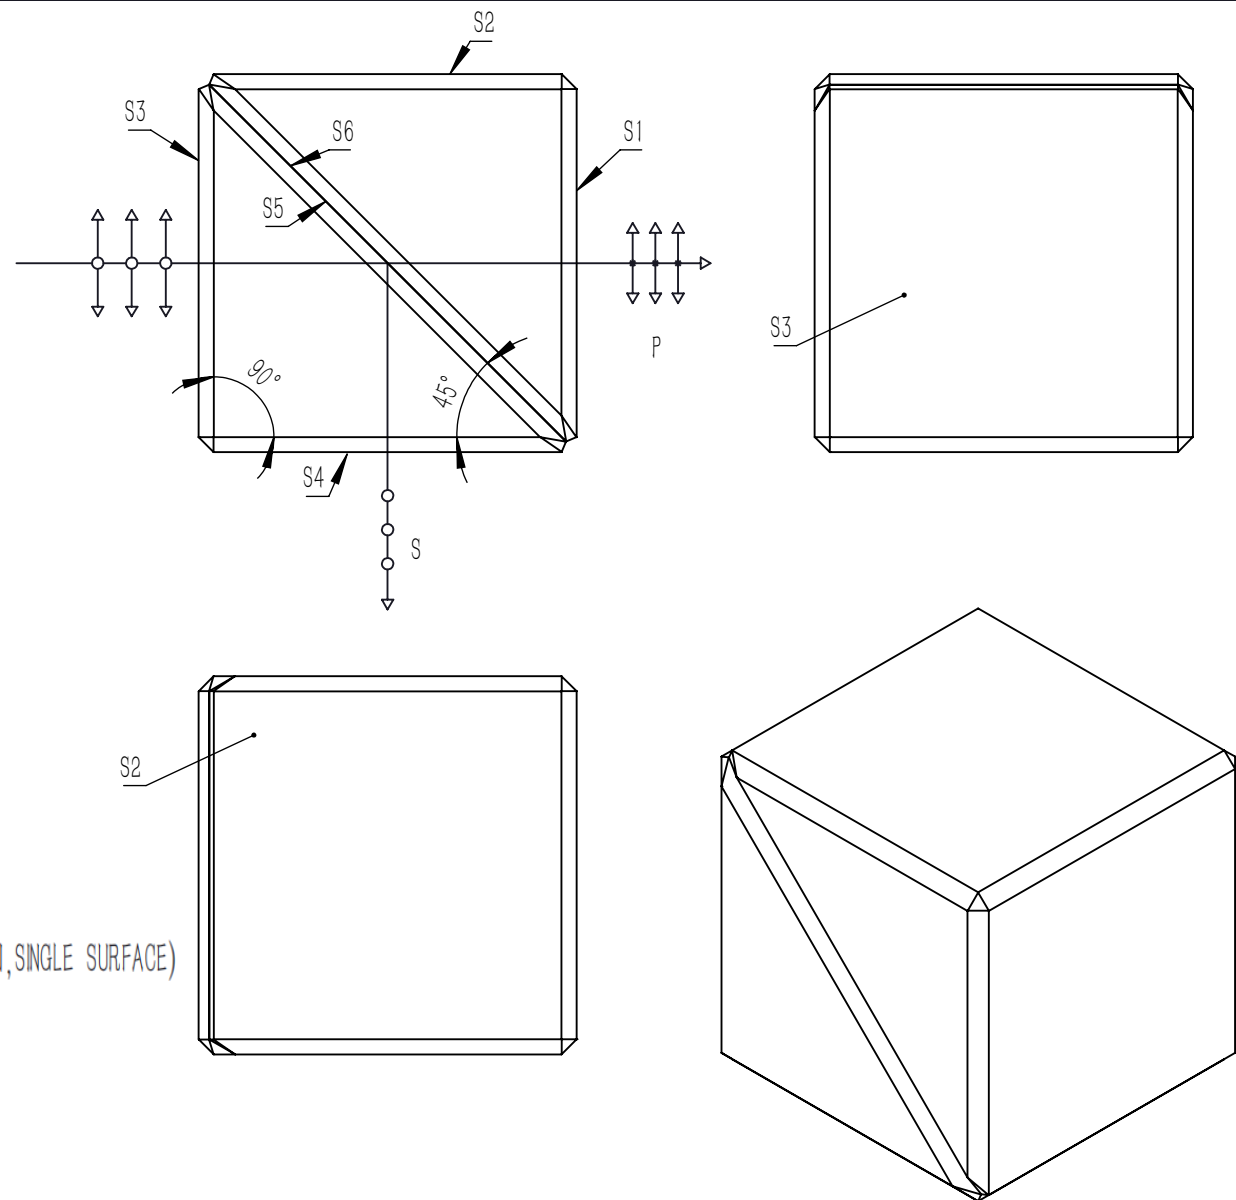




1. CLEAR APERTURE:  $>80\%CA$
2. AR COATING(S1,S2,S3,S4):  $R_{avg}<0.5\%$  @1200 nm– 1600 nm( $6^\circ$  AOI,SINGLE SURFACE)
3. DIAMETER TOLERANCE:  $\pm 0.25$  mm
4. ANGLE TOLERANCE:  $\pm 1'$
5. COATING(S5):  $T_p>90\%$ ,  $R_{s,avg}>95\%$
6. GLUED(S5,S6): NOA61
7. EXTINCTION RATIO( $T_p:T_s$ ):  $>1000:1$
8. TRANSMITTED BEAM DEVIATION:  $0^\circ \pm 5$  arcmin
9. REFLECTED BEAM DEVIATION:  $90^\circ \pm 5$  arcmin
10. SURFACE QUALITY(S1,S2,S3,S4): 40/20(S/D)
11. WAVEFRONT ERROR(RMS):  $\lambda/4@633$  nm
12. SURFACE FLATNESS(S1,S2,S3,S4):  $\lambda/4@633$  nm
13. OTHER SURFACES: FINE GROUND
14. CHAMFER:  $<0.2$  mm, $45^\circ$

|                                                                                                          |      |                 |                            |  |                   |        |       |     |
|----------------------------------------------------------------------------------------------------------|------|-----------------|----------------------------|--|-------------------|--------|-------|-----|
| DRAWING PROJECTION  |      |                 | PBS10-D                    |  | <b>Zolix</b>      |        |       |     |
|                                                                                                          | NAME | DATE            | POLARIZATION BEAM SPLITTER |  | MATERIAL          | WEIGHT | SCALE | REV |
| DRAWN                                                                                                    | NIC  | 21/October/2025 |                            |  |                   |        |       |     |
| APPROVAL                                                                                                 | DICK | 21/October/2025 |                            |  | FOLLOW THE PARTS  | 0.000  | 10:1  |     |
| THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION                                                     |      |                 |                            |  | shop.zolix.com.cn |        |       |     |